


- Precision diecast aluminium construction.
- Torsion springs fixing mechanism.
- For use in ceilings up to 25mm deep.
- Soft bezel for enhanced glare control.
- Supplied with a softening lens as standard.
- A wide choice of:
 - Lumen Outputs
 - Colour Temperature
 - Beam Angles
 - Colour Fidelity Options
 - Accessories



Product Options

Light Source

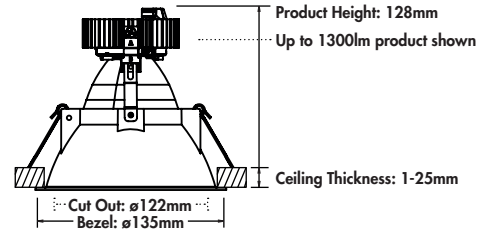

XTM

XOB

Output




Colour Temperature




Colour Fidelity



Beam Angle

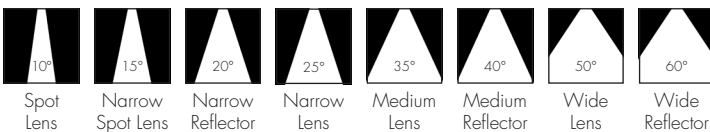

Bezel Colour



Accessories



Honeycomb Louvre Clear Glass Lens Spreader Lens

Product Builder

		Availability	XTM	XOB
		Light Source		
(XT)	XTM		<input type="checkbox"/>	<input type="checkbox"/>
(XO)	XOB		<input type="checkbox"/>	<input type="checkbox"/>
		Lumen Output		
(05)	500lm		<input type="checkbox"/>	<input type="checkbox"/>
(07)	700lm		<input type="checkbox"/>	<input type="checkbox"/>
(10)	1000lm		<input type="checkbox"/>	<input type="checkbox"/>
(13)	1300lm		<input type="checkbox"/>	<input type="checkbox"/>
(20)	2000lm		<input type="checkbox"/>	<input type="checkbox"/>
(30)	3000lm		<input type="checkbox"/>	<input type="checkbox"/>
(40)	4000lm		<input type="checkbox"/>	<input type="checkbox"/>
		Colour Temperature		
(22)	2200k		<input type="checkbox"/>	<input type="checkbox"/>
(27)	2700k		<input type="checkbox"/>	<input type="checkbox"/>
(30)	3000k		<input type="checkbox"/>	<input type="checkbox"/>
(35)	3500k		<input type="checkbox"/>	<input type="checkbox"/>
(40)	4000k		<input type="checkbox"/>	<input type="checkbox"/>
(56)	5600k		<input type="checkbox"/>	<input type="checkbox"/>
		Colour Fidelity		
(80)	CRI 80+		<input type="checkbox"/>	<input type="checkbox"/>
(98)	CRI 98		<input type="checkbox"/>	<input type="checkbox"/>
(V8)	Vibrancy 80		<input type="checkbox"/>	<input type="checkbox"/>
(V9)	Vibrancy 98		<input type="checkbox"/>	<input type="checkbox"/>
(90)	Designer Series 90		<input type="checkbox"/>	<input type="checkbox"/>
(BT)	Beauty Series		<input type="checkbox"/>	<input type="checkbox"/>
		Beam Angle		
(SL)	Spot Lens 10°		<input type="checkbox"/>	<input type="checkbox"/>
(2L)	Narrow Spot Lens 15°		<input type="checkbox"/>	<input type="checkbox"/>
(NR)	Narrow Reflector 20°		<input type="checkbox"/>	<input type="checkbox"/>
(NL)	Narrow Lens 25°		<input type="checkbox"/>	<input type="checkbox"/>
(ML)	Medium Lens 35°		<input type="checkbox"/>	<input type="checkbox"/>
(MR)	Medium Reflector 40°		<input type="checkbox"/>	<input type="checkbox"/>
(WL)	Wide Lens 50°		<input type="checkbox"/>	<input type="checkbox"/>
(WR)	Wide Reflector 60°		<input type="checkbox"/>	<input type="checkbox"/>
		Colour		
(W)	White		<input type="checkbox"/>	<input type="checkbox"/>
(B)	Black		<input type="checkbox"/>	<input type="checkbox"/>
(P)	Custom Colour		<input type="checkbox"/>	<input type="checkbox"/>
MX	/**/**			
	Control			
/DD	DALI			
/DP	DALI Pro			
/DA	1-10v			
/AP	0.1-10v			
/PH	Phase			
/BX	BLE Xicato			
/BC	BLE Casambi			
	Accessories			
/HL	Honeycomb Louvre			
/CG	Clear Glass			
/RG	Spreader Lens			
	Emergency			
/M3	3 hour Maintained			
/ST	Self Test			
/DE	DALI Emergency			
	Key			
	Available		<input type="checkbox"/>	<input type="checkbox"/>
	Not Available		<input type="checkbox"/>	<input type="checkbox"/>

Micro 120 - XOB

Colour Fidelity		Designer Series CRI90						
		500lm	700lm	1000lm	1300lm	2000lm	3000lm	4000lm
Lumen Output								
Colour Temperature								
2700k	(27)	●	●	○	○	⊙	○	○
3000k	(30)	●	●	○	○	⊙	○	○
4000k	(40)	●	●	○	○	⊙	○	○
Beam Angle								
Spot Lens 10°	(SL)	●	●	○	○	-	-	-
Narrow Spot Lens 15°	(2L)	●	●	○	○	-	-	-
Narrow Lens 25°	(NL)	●	●	○	○	-	-	-
Medium Lens 35°	(ML)	●	●	○	○	⊙	-	-
Medium Reflector 45°	(MR)	●	●	○	○	⊙	○	○
Wide Lens 55°	(WL)	●	●	○	○	⊙	-	-
Wide Reflector 60°	(WR)	●	●	○	○	⊙	○	○
Bezel Colour								
White	(W)	●	●	○	○	⊙	○	○
Black	(B)	●	●	○	○	⊙	○	○
Custom Colour	(P)	●	●	○	○	⊙	○	○
Control								
Standard		●	●	○	○	⊙	○	○
DAII	/DD	●	●	○	○	⊙	○	○
DAII Pro	/DP	●	●	○	○	⊙	○	○
1-10v	/DA	●	●	○	○	⊙	○	○
0.1-10v	/AP	●	●	○	○	⊙	○	○
Phase	/PH	-	●	○	○	⊙	○	-
Bluetooth Casambi	/BC	-	●	○	○	⊙	○	○
Bluetooth Xicato	/BX	-	●	○	○	⊙	○	○
Emergency								
3hrs Maintained	/M3	●	●	○	○	⊙	○	○
Self Test	/ST	●	●	○	○	⊙	○	○
DAII Emergency	/DE	●	●	○	○	⊙	○	○
Accessories								
Honeycomb Louvre	/HL	●	●	○	○	⊙	○	○
Clear Glass Lens	/CG	●	●	○	○	⊙	○	○
Softening Lens ¹	/SL	●	●	○	○	⊙	○	○
Spread Lens	/RS	●	●	○	○	⊙	○	○


Key

- Available with all beam angles.
- Not available with Spot Lens 10° (SL)
- ⊙ Not available with Spot Lens 10° (SL) / Narrow Spot Lens 15° (2L) / Narrow Lens 25° (NL)
- Not available with Spot Lens 10° (SL) / Narrow Spot Lens 15° (2L) / Narrow Lens 25° (NL) / Medium Lens 35° (ML) / Wide Lens 55° (WL)
- Not available

Notes:
¹ Softening lens supplied as standard.


Micro 120

Dimensions



Ceiling cutout: \varnothing 122mm
 Max ceiling thickness: 1 - 25mm

XTM - Product Height



Medium Lens 35° / Wide Lens 50°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	128mm	128mm	128mm
700lm	128mm	128mm	128mm
1000lm	128mm	128mm	128mm
1300lm	128mm	128mm	128mm
2000lm	138mm	138mm	138mm


Narrow Spot Lens 15° / Narrow Lens 25°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	128mm	128mm	128mm
700lm	128mm	128mm	128mm
1000lm	128mm	138mm	138mm
1300lm	138mm	138mm	-

Narrow Reflector 20° / Medium Reflector 40° / Wide Reflector 60°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	128mm	128mm	128mm
700lm	128mm	128mm	128mm
1000lm	128mm	128mm	128mm
1300lm	128mm	128mm	128mm
2000lm	138mm	138mm	138mm
3000lm	158mm	178mm	178mm
4000lm	178mm	-	-

XOB - Product Height



Medium Lens 40° / Wide Lens 55°

	Designer Series CRI90
500lm	126mm
700lm	126mm
1000lm	126mm
1300lm	126mm
2000lm	136mm

Spot Lens 10° / Narrow Spot Lens 15° / Narrow Lens 25°

	Designer Series CRI90
500lm	126mm
700lm	126mm
1000lm	126mm
1300lm	126mm

Medium Reflector 45° / Wide Reflector 60°

	Designer Series CRI90
500lm	124mm
700lm	124mm
1000lm	124mm
1300lm	124mm
2000lm	134mm
3000lm	134mm
4000lm	154mm

Micro 120

Circuit Wattage

XTM - Total Circuit Wattage

Narrow Spot Lens 15° / Narrow Lens 25°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	6.7W	6.7W	9.0W
700lm	9.0W	9.0W	12.9W
1000lm	12.9W	12.9W	18.4W
1300lm	18.4W	18.4W	-

Medium Lens 35° / Wide Lens 50°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	4.4W	5.2W	5.6W
700lm	6.0W	6.8W	7.9W
1000lm	8.3W	9.6W	11.2W
1300lm	11.9W	13.6W	16.0W
2000lm	18.0W	20.1W	23.7W

Narrow Reflector 20° / Medium Reflector 40° / Wide Reflector 60°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	4.4W	5.2W	5.6W
700lm	6.0W	6.8W	7.9W
1000lm	8.3W	9.6W	11.2W
1300lm	11.9W	13.6W	16.0W
2000lm	18.0W	20.1W	23.7W
3000lm	29.7W	29.7W	34.8W
4000lm	39.0W	-	-

XOB - Total Circuit Wattage

Spot Lens 10°

	Designer Series CRI90
500lm	5.9W
700lm	7.6W

Narrow Spot Lens 15° / Narrow Lens 25°

	Designer Series CRI90
500lm	5.3W
700lm	7.1W
1000lm	9.8W
1300lm	11.8W

Medium Lens 40° / Wide Lens 55°

	Designer Series CRI90
500lm	5.3W
700lm	7.1W
1000lm	9.8W
1300lm	11.8W
2000lm	17.5W

Medium Reflector 45° / Wide Reflector 60°

	Designer Series CRI90
500lm	5.3W
700lm	7.1W
1000lm	9.8W
1300lm	11.8W
2000lm	17.5W
3000lm	25.9W
4000lm	37.3W

Micro 120

Paint Finish

Bezel



White
RAL 9003



Black
RAL 9004



Custom Colour