




- Precision diecast aluminium construction.
- Saw blade fixing mechanism.
- For use in ceilings up to up to 25mm deep.
- A wide choice of: - Lumen Outputs  
- Colour Temperature  
- Beam Angles  
- Colour Fidelity Options  
- Accessories

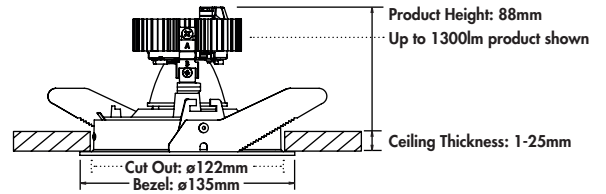

## Product Options


### Light Source



XTM

XOB

### Output




### Colour Temperature




### Colour Fidelity




### Beam Angle

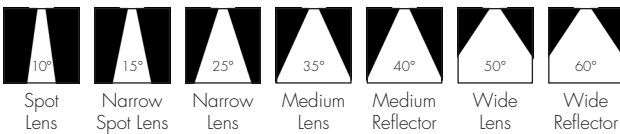

### Bezel Colour



### Accessories



## Product Builder

		Availability	XTM	XOB
		<b>Light Source</b>		
(XT)		XTM	○	-
(XO)		XOB	-	○
		<b>Lumen Output</b>		
(05)		500lm	○	○
(07)		700lm	○	○
(10)		1000lm	○	○
(13)		1300lm	○	○
(20)		2000lm	○	○
(30)		3000lm	○	○
(40)		4000lm	○	○
(50)		5000lm	○	-
		<b>Colour Temperature</b>		
(22)		2200k	○	-
(27)		2700k	○	○
(30)		3000k	○	○
(35)		3500k	○	-
(40)		4000k	○	○
(56)		5600k	○	-
		<b>Colour Fidelity</b>		
(80)		CRI 80+	○	-
(98)		CRI 98	○	-
(V8)		Vibrancy 80	○	-
(V9)		Vibrancy 98	○	-
(90)		Designer Series 90	○	○
(BT)		Beauty Series	○	-
		<b>Beam Angle</b>		
(SL)		Spot Lens 10°	-	○
(2L)		Narrow Spot Lens 15°	○	○
(NL)		Narrow Lens 25°	○	○
(ML)		Medium Lens 35°	○	○
(MR)		Medium Reflector 40°	○	○
(WL)		Wide Lens 50°	○	○
(WR)		Wide Reflector 60°	○	○
		<b>Colour</b>		
(W)		White	○	○
(B)		Black	○	○
(N)		Satin Nickel	○	○
(P)		Custom Colour	○	○
<b>W2</b>		<b>Control</b>	<b>Accessories</b>	
/DD		DALI	/HL	Honeycomb Louvre
/DP		DALI Pro	/CG	Clear Glass
/DA		1-10v	/SL	Softening Lens
/AP		0.1-10v	/RG	Spread Lens
/PH		Phase		
/BX		BLE Xicato		
/BC		BLE Casambi		
		<b>Emergency</b>		
/M3		3 hour Maintained	<b>Key</b>	
/ST		Self Test	Available	○
/DE		DALI Emergency	Not Available	-



# Area - XOB


Colour Fidelity		Designer Series CRI90						
Lumen Output		500lm	700lm	1000lm	1300lm	2000lm	3000lm	4000lm
<b>Colour Temperature</b>								
2700k	(27)	●	●	○	○	⊙	○	○
3000k	(30)	●	●	○	○	⊙	○	○
4000k	(40)	●	●	○	○	⊙	○	○
<b>Beam Angle</b>								
Spot Lens 10°	(SL)	●	●	○	○	-	-	-
Narrow Spot Lens 15°	(2L)	●	●	○	○	-	-	-
Narrow Lens 25°	(NL)	●	●	○	○	-	-	-
Medium Lens 35°	(ML)	●	●	○	○	⊙	-	-
Medium Reflector 45°	(MR)	●	●	○	○	⊙	○	○
Wide Lens 55°	(WL)	●	●	○	○	⊙	-	-
Wide Reflector 60°	(WR)	●	●	○	○	⊙	○	○
<b>Bezel Colour</b>								
White	(W)	●	●	○	○	⊙	○	○
Black	(B)	●	●	○	○	⊙	○	○
Satin Nickel	(N)	●	●	○	○	⊙	○	○
Custom Colour	(P)	●	●	○	○	⊙	○	○
<b>Control</b>								
Standard		●	●	○	○	⊙	○	○
DAU	/DD	●	●	○	○	⊙	○	○
DAU Pro	/DP	●	●	○	○	⊙	○	○
1-10v	/PH	●	●	○	○	⊙	○	○
0.1-10v	/AP	●	●	○	○	⊙	○	○
Phase	/PH	-	●	○	○	⊙	○	-
Bluetooth Casambi	/BC	-	●	○	○	⊙	○	○
Bluetooth Xicato	/BX	-	●	○	○	⊙	○	○
<b>Emergency</b>								
3hrs Maintained	/M3	●	●	○	○	⊙	○	○
Self Test	/ST	●	●	○	○	⊙	○	○
DAU Emergency	/DE	●	●	○	○	⊙	○	○
<b>Accessories</b>								
Honeycomb Louvre	/HL	●	●	○	○	⊙	○	○
Clear Glass Lens	/CG	●	●	○	○	⊙	○	○
Softening Lens	/SL	●	●	○	○	⊙	○	○
Spread Lens	/RS	●	●	○	○	⊙	○	○

**Key**

- Available with all beam angles.
- Not available with Spot Lens 10° (SL)
- ⊙ Not available with Spot Lens 10° (SL) / Narrow Spot Lens 15° (2L) / Narrow Lens 25° (NL)
- Not available with Spot Lens 10° (SL) / Narrow Spot Lens 15° (2L) / Narrow Lens 25° (NL) / Medium Lens 35° (ML) / Wide Lens 55° (WL)
- Not available


# Area

## Dimensions



Ceiling cutout:  $\varnothing 122\text{mm}$   
 Max ceiling thickness: 1 - 25mm

### XTM - Product Height

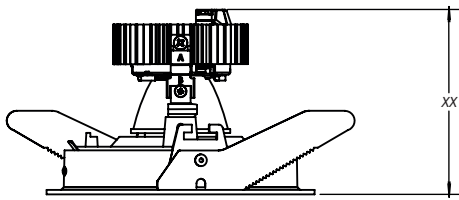

### Medium Lens 35° / Wide Lens 50°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	93mm	93mm	93mm
700lm	93mm	93mm	93mm
1000lm	93mm	93mm	93mm
1300lm	93mm	93mm	93mm
2000lm	103mm	103mm	103mm


### Narrow Spot Lens 15° / Narrow Lens 25°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	93mm	93mm	93mm
700lm	93mm	93mm	93mm
1000lm	93mm	103mm	103mm
1300lm	103mm	123mm	-

### Medium Reflector 40° / Wide Reflector 60°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	93mm	93mm	93mm
700lm	93mm	93mm	93mm
1000lm	93mm	93mm	93mm
1300lm	93mm	93mm	93mm
2000lm	103mm	103mm	103mm
3000lm	123mm	121mm	121mm
4000lm	121mm	121mm	121mm
5000lm	141mm	-	-

### XOB - Product Height

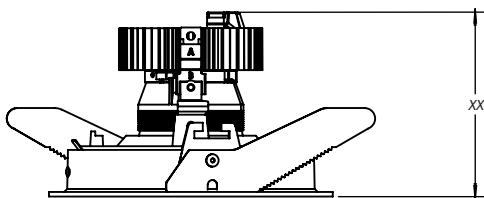

### Medium Lens 40° / Wide Lens 55°

	Designer Series CRI90
500lm	88mm
700lm	88mm
1000lm	88mm
1300lm	88mm
2000lm	98mm

### Spot Lens 10° / Narrow Spot Lens 15° / Narrow Lens 25°

	Designer Series CRI90
500lm	88mm
700lm	88mm
1000lm	88mm
1300lm	88mm

### Medium Reflector 45° / Wide Reflector 60°

	Designer Series CRI90
500lm	88mm
700lm	88mm
1000lm	88mm
1300lm	88mm
2000lm	98mm
3000lm	98mm
4000lm	188mm

## Area

## Circuit Wattage

## XTM - Total Circuit Wattage

## Narrow Spot Lens 15° / Narrow Lens 25°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	6.7W	6.7W	9.0W
700lm	9.0W	9.0W	12.9W
1000lm	12.9W	12.9W	18.4W
1300lm	18.4W	18.4W	28.2W

## Medium Lens 35° / Wide Lens 50°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	4.4W	5.2W	5.6W
700lm	6.0W	6.8W	7.9W
1000lm	8.3W	9.6W	11.2W
1300lm	11.9W	13.6W	16.0W
2000lm	18.0W	20.1W	-

## Medium Reflector 40° / Wide Reflector 60°

	CRI80+ / Vibrancy 80	Designer Series CRI90	CRI98 / Vibrancy 98 / Beauty Series
500lm	4.4W	5.2W	5.6W
700lm	6.0W	6.8W	7.9W
1000lm	8.3W	9.6W	11.2W
1300lm	11.9W	13.6W	16.0W
2000lm	18.0W	20.1W	23.7W
3000lm	29.7W	29.7W	34.8W
4000lm	39.0W	39.0W	51.9W
5000lm	47.5W	-	-

## XOB - Total Circuit Wattage

## Spot Lens 10°

	Designer Series CRI90
500lm	5.9W
700lm	7.6W

## Narrow Spot Lens 15° / Narrow Lens 25°

	Designer Series CRI90
500lm	5.3W
700lm	7.1W
1000lm	9.8W
1300lm	11.8W

## Medium Lens 40° / Wide Lens 55°

	Designer Series CRI90
500lm	5.3W
700lm	7.1W
1000lm	9.8W
1300lm	11.8W
2000lm	17.5W

## Medium Reflector 45° / Wide Reflector 60°

	Designer Series CRI90
500lm	5.3W
700lm	7.1W
1000lm	9.8W
1300lm	11.8W
2000lm	17.5W
3000lm	25.9W
4000lm	37.3W

# Area

## Paint Finish

### Bezel



White  
RAL 9010



Black  
RAL 9017



Satin Nickel



Custom Colour