


Micro 50 Surface



Description

The Micro 50 Surface is a surface mounted cylinder luminaire with an integral driver. Designed for maximum visual comfort, the Micro 90 Surface has a deep set soft bezel and is supplied with a softening lens as standard. Available in alphaLED's wide range of lumen outputs, colour temperature, beam angle, colour fidelity and accessory options.



Product Options

Light Source



XOB

Output




Colour Temperature




Colour Fidelity




Beam Angle

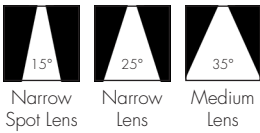

Body Colour

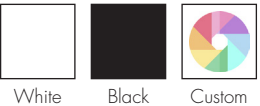

Bezel Colour

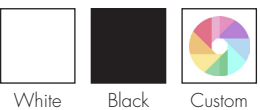

Accessories



Product Bulider

	Availability	XOB
Light Source		
(XO)	XOB	<input type="radio"/>
Lumen Output		
(05)	500lm	<input type="radio"/>
(07)	700lm	<input type="radio"/>
(10)	1000lm	<input type="radio"/>
Colour Temperature		
(27)	2700k	<input type="radio"/>
(30)	3000k	<input type="radio"/>
(40)	4000k	<input type="radio"/>
Colour Fidelity		
(90)	Designer Series 90	<input type="radio"/>
Beam Angle		
(2L)	Narrow Spot Lens 15°	<input type="radio"/>
(NL)	Narrow Lens 25°	<input type="radio"/>
(ML)	Medium Lens 35°	<input type="radio"/>
Body Colour		
(W)	White	<input type="radio"/>
(B)	Black	<input type="radio"/>
(P)	Custom Colour	<input type="radio"/>
Bezel Colour		
(W)	White	<input type="radio"/>
(B)	Black	<input type="radio"/>
(PI)	Custom Colour	<input type="radio"/>

5S _____ **Control** _____ **Accessories**

/DD	DALI	/HL	Honeycomb Louvre
/DP	DALI Pro	/CG	Clear Glass
/DA	1-10v		
/AP	0.1-10v		
/PH	Phase		
/BC	BLE Casambi		

Key	
Available	<input type="radio"/>
Not Available	-

Micro 50 Surface - XOB

Colour Fidelity		Designer Series CRI90						
Lumen Output		500lm	700lm	1000lm	1300lm	2000lm	3000lm	4000lm
Colour Temperature								
2700k	(27)	●	●	●	-	-	-	-
3000k	(30)	●	●	●	-	-	-	-
4000k	(40)	●	●	●	-	-	-	-
Beam Angle								
Narrow Spot Lens 1.5°	(2L)	●	●	●	-	-	-	-
Narrow Lens 25°	(NL)	●	●	●	-	-	-	-
Medium Lens 35°	(ML)	●	●	●	-	-	-	-
Bezel Colour								
White	(W)	●	●	●	-	-	-	-
Black	(B)	●	●	●	-	-	-	-
Custom Colour	(P)	●	●	●	-	-	-	-
Body Colour								
White	(WI)	●	●	●	-	-	-	-
Black	(BI)	●	●	●	-	-	-	-
Custom Colour	(PI)	●	●	●	-	-	-	-
Control								
Standard		●	●	●	-	-	-	-
DAII	/DD	●	●	●	-	-	-	-
DAII Pro	/DP	●	●	●	-	-	-	-
1-10v	/DA	●	●	●	-	-	-	-
0.1-10v	/AP	●	●	●	-	-	-	-
Phase	/PH	●	-	-	-	-	-	-
Bluetooth Casambi	/BC	●	●	●	-	-	-	-
Accessories								
Honeycomb Louvre	/HL	●	●	●	-	-	-	-
Clear Glass Lens	/CG	●	●	●	-	-	-	-
Softening Lens ¹	/SL	●	●	●	-	-	-	-



Key

- Available with all beam angles.
- Not available

Notes:
¹ Softening lens supplied as standard.


Micro 50 Surface

Dimensions

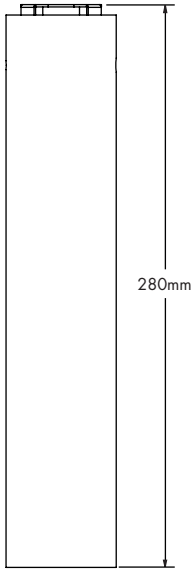

Paint Finish

Bezel



White
RAL 9003



Black
RAL 9004



Custom Colour

Circuit Wattage

XOB - Total Circuit Wattage

Narrow Spot Lens 15° / Narrow Lens 25° / Medium Lens 35°

Designer Series CRI90

500lm	5.9W
700lm	7.6W
1000lm	9.8W

