


# DEZZI SPOT ZOOM

Project \_\_\_\_\_

Type \_\_\_\_\_

Part Number \_\_\_\_\_

Quantity \_\_\_\_\_



**Light Source**



XOB

**Output**

500 700 1000 1300  
500lm 700lm 1000lm 1300lm

**Colour Temperature**

2700k 3000K 4000K

**Colour Fidelity**

90 98 198  
90 98 Vibrancy 98

**Beam Angle**



Zoom Lens

**Body Colour**

White Black Custom

**Bezel Colour**

White Black

**Accessories**



Zoomable Spread

**230v Control**

ON/OFF ON/OFF RECESSED DALI DALI PRO RECESSED CASAMBI PHASE ROTARY  
On/Off On/Off Recessed Dali Dali Pro Recessed Casambi Phase Rotary Dim

**48v Control**

48v ON/OFF 48v DALI  
48v On/Off 48v Dali

**Availability**

Code	Availability
(XO)	Light Source XOB -
(05)	Lumen Output 500lm ○
(07)	700lm ○
(10)	1000lm ○
(13)	1300lm ○
(27)	Colour Temperature 2700k ○
(30)	3000k ○
(40)	4000k ○
(90)	Colour Fidelity CRI90 ○
(98)	CRI98 ○
(V9)	Vibrancy 98 ○
(ZM)	Beam Angle Zoom Lens 15° - 55° ○
(W)	Body Colour White ○
(B)	Black ○
(P)	Custom Colour ○
(W1)	Bezel Colour White ○
(B1)	Black ○

DSZ \_\_\_\_\_ /\*\*/\*\*

**Control**

230v  
/OR On/Off Recessed  
/DD DALI  
/DR DALI Pro Recessed  
/PH Phase  
/BC BLE Casambi  
/PH Phase  
/RD Rotary Dim  
48v  
/48 48v On/Off  
/4D 48v DALI

**Accessories**

/ZS Zoomable Spread Lens

Key	
Available	○
Not Available	-

# DEZZI SPOT ZOOM

## Description

The Dezzi Spot Zoom is a high performance, track mounted spotlight, available with a large range of outputs, colour rendering and accessory options. The Zoomable beam angles allows for variety of applications from a single fitting. Both tilt and rotation are lockable, ensuring total consistency over an installation. The entire Dezzi range has been designed around a replaceable modular concept to support use in the circular economy.

## Features




## Certification




## Paint Finish

### Body



### Bezel



## Physical

IP Rating	IP20
Adjustability	90° Tilt, 360° Rotation, Lockable
Size	ø64mm, 143mm
Mounting Method	Track Mounted
Body Material	Aluminium
Bezel Material	ABS
Lens Material	PMMA

**DEZZI SPOT ZOOM****Electrical**

---

<b>Voltage</b>	220-240v
<b>Circuit Wattage</b>	From 5.9w to 13.8w, please see page 5

---

**Performance**

---

<b>Delivered Lumens</b>	Please see website for latest LDT files
<b>UGR</b>	<19 available, please see website for latest LDT files
<b>Efficacy</b>	Please see website for latest LDT files

---

**Static White**

---



<b>Colour Consistency</b>	1x2 SDCM
<b>Lifetime XOB TM21</b>	L90 B0 @50,000hrs
<b>Lifetime XOB Calculated</b>	L70 @150,000hrs

---

alphaLED are constantly developing and improving our product range. All descriptions, illustrations, drawings and specifications in this spec sheet are present and correct, they perform only general particulars and shall not form any part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of sale, a copy of which is available on request.

# DEZZI SPOT ZOOM

## Dimensions

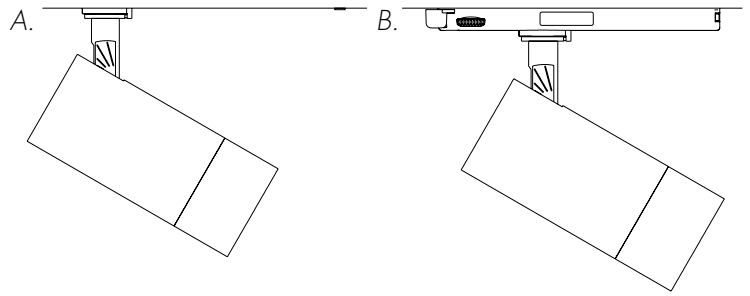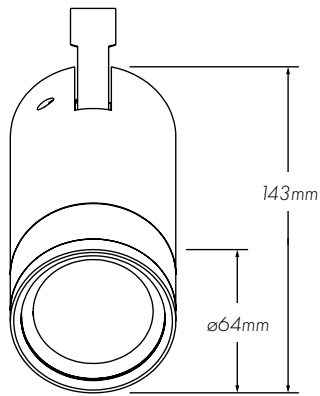

TYPE A. RECESSED INTRACK  
TYPE B. INTRACK

ON/OFF/DALI PRO RECESSED  
ALL OTHER CONTROL

## XOB - Product Height

### Zoom Lens 15° - 55°

	CRI80+	CRI90	CRI98 / Vibrancy 98
500lm	143mm	143mm	143mm
700lm	143mm	143mm	143mm
1000lm	143mm	143mm	143mm
1300lm	143mm	143mm	143mm

# DEZZI SPOT ZOOM

## Wattage

---

### XOB - Circuit Wattage

---

#### Zoom Lens 15° - 55°

---


	CRI90	CRI98 / Vibrancy 98
500lm	5.3W	5.3W
700lm	7.1W	7.1W
1000lm	9.8W	9.8W
1300lm	11.8W	13.8W

# DEZZI SPOT ZOOM


## Module Data

### XOB CRI90 3000K

CIE Ra 91 R9 55




TM-30 Rf 90 Rg 98


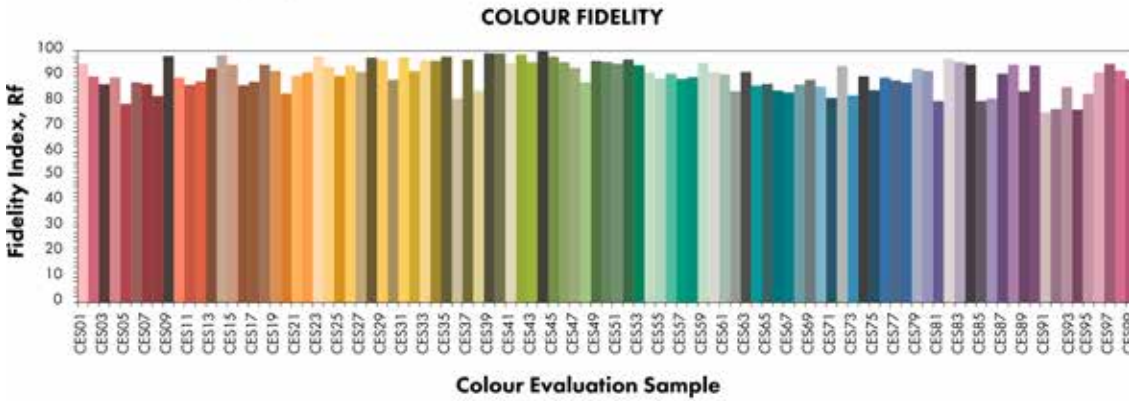


### XOB CRI98 3000K

CIE Ra 98 R9 95




TM-30 Rf 93 Rg 100

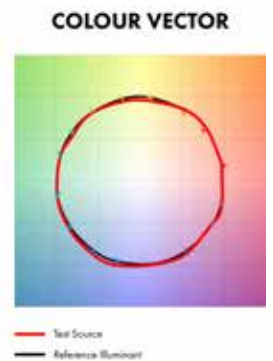
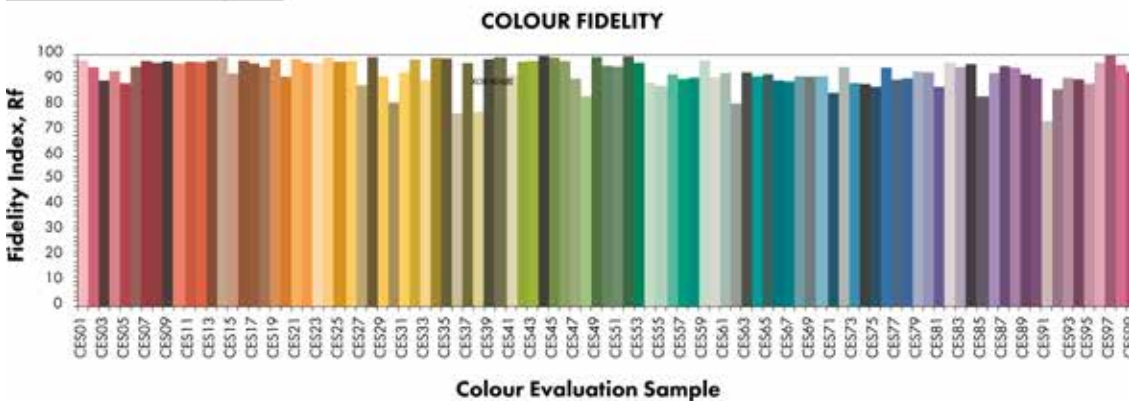


### XOB VIBRANCY

CIE Ra 95 R9 91



TM-30 Rf 94 Rg 104

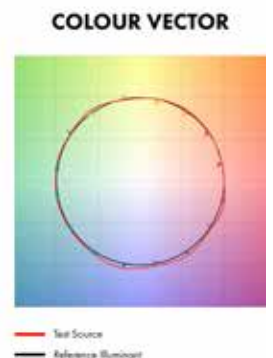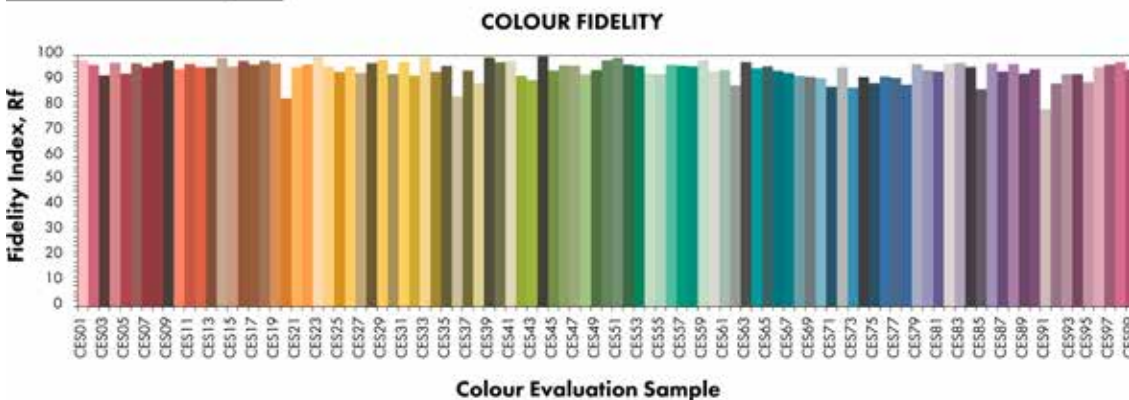

Other CCT data available on request.